
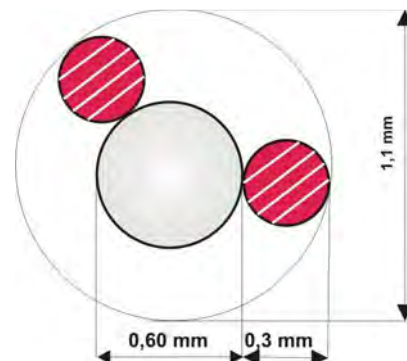


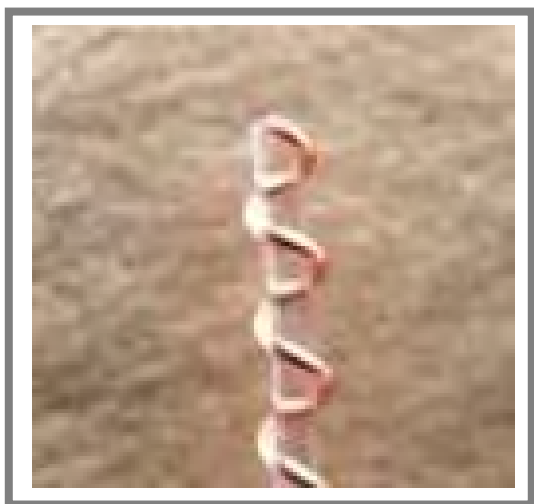

OTHER PRODUCT WITH THE SAME CHARACTERISTICS

Sealing wire in following materials:

SPR.Z : galvanized 1 mm (kg 1 = 400 mt.)

SPR.I : steel 1 mm (kg 1 = 400 m.)

SPR.O : copper 1 mm kg 1 = 370 m.

SPR.R : brass 1 mm (kg 1 = 350 m.)

SPR.NR : nylon core +copper wire 1mm
1 reel = 300g = 180 mt.

STS -PL : STAINLESS STEEL CABLE
Diam 1 mm

STW-PL : STEEL WIRE, PLASTIFIED
Diam mm 1

NYW-PL : NYLON WIRE, PLASTIFIED
Diam 1,3 mm

1,1 MM DIAMETER NYLON COPPER SEALING WIRE TECHNICAL DATA TABLE

1. MATERIAL CLASSIFICATION: Nylon - Copper

2. COMPOSITION: Core nylon : Ø 0.6 mm - 100% Poliammide
Spiral: red ANNEALED copper : Ø 0.3 mm . in conformity of ASTM 49,92 – UNI EN 1977 - 2000

4. MECHANICAL CHARACTERISTICS:
TOTAL DIAMETER / BREAKING LOAD

STANDARD DIAMETER mm	TOLLERANCE Ø	BREAKING LOAD N/mm ²
1.10	10%	159/178

STRENGTH PER METRE: 1,50g (1 Kg = 650 m ca)

5. STRUCTURAL CHARACTERISTICS:

COIL DISTANCE: 1,50 mm (66 coils per 100 mm)