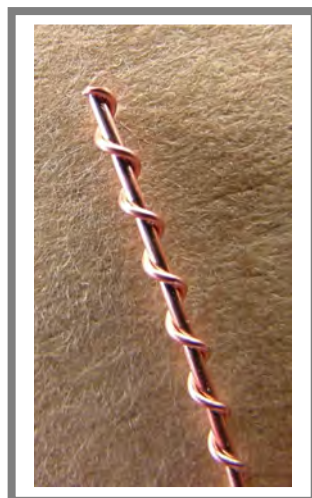
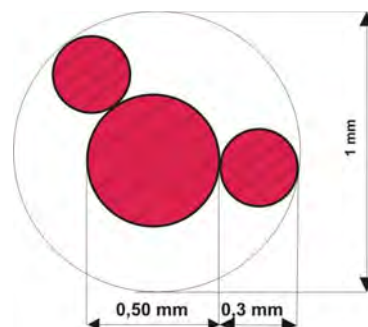


1 mm


OTHER PRODUCT WITH THE SAME CHARACTERISTICS

Sealing wire in following materials:

SPR.Z : galvanized 1 mm (kg 1 = 400 mt.

SPR.I : steel 1 mm (kg 1 = 400 m.)

SPR.O : copper 1 mm kg 1 = 370 m.

SPR.R : brass 1 mm (kg 1 = 350 m.)

SPR.NR : nylon core +copper wire 1mm

1 reel = 300g = 180 mt.

STS -PL : STAINLESS STEEL CABLE

Diam 1 mm

STW-PL : STEEL WIRE, PLASTIFIED

Diam mm 1

NYW-PL : NYLON WIRE, PLASTIFIED

Diam 1.3 mm

1MM DIAMETER RED COPPER SEALING WIRE TECHNICAL DATA TABLE
1. MATERIAL CLASSIFICATION: RED COPPER ANNEALED ASTM B 49,92 – UNI EN 1977 – 2000

2. CHEMICAL BREAKDOWN:

Cu	Fe	Pb	As	Ag	Ni	Sn	S
99,974	0,0035	0,0013	0,0011	0,011	0,0008	0,0009	0,004

3. COMPOSITION: Core wire: Ø mm 0.50 - Spiral wire: Ø mm 0.30

4. MECHANICAL CHARACTERISTICS:

TOTAL DIAMETER / BREAKING LOAD

STANDARD DIAMETER mm	TOLERANCE Ø	BREAKING LOAD N/mm ²
1.00	10%	210/220

STRENGTH PER METRE: 2,78g (1 Kg = 360 mt appx)

5. STRUCTURAL CHARACTERISTICS:

COIL DISTANCE: 2.00 mm (50 coils per 100 mm)

6. SURFACE CHARACTERISTICS:

SURFACE STATE: GLOSSY

7. ELONGATION: 23-23%
SECURITY SEALS FOR ALL INDUSTRIES AND TRANSPORTS – TAMPERING PREVENTION SYSTEMS